
, • • • ·


Alexander, III et al.


Method and Apparatus for Averaging Out Variations in Run-to-Run Path Data of a Computer Program

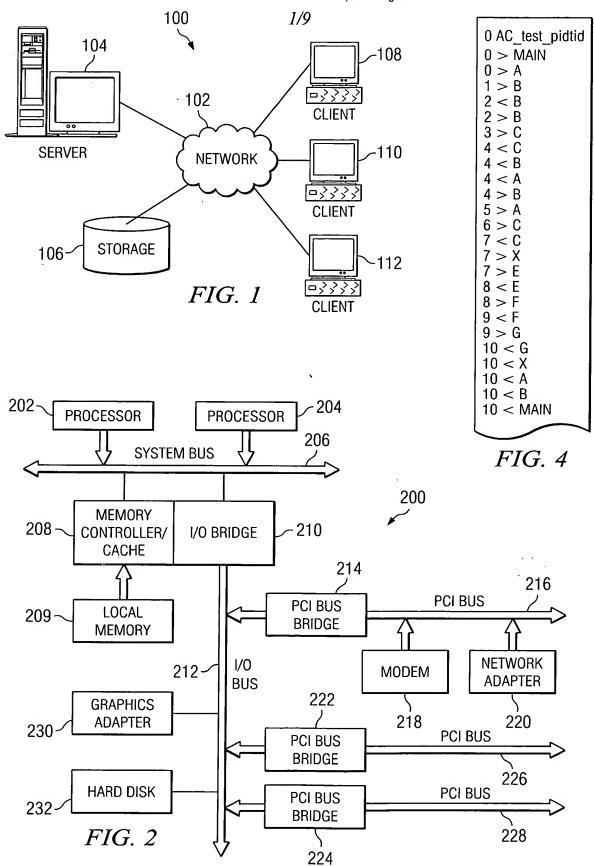

Alexander, III et al.

Method and Apparatus for Averaging Out Variations in Run-to-Run Path Data of a Computer Program

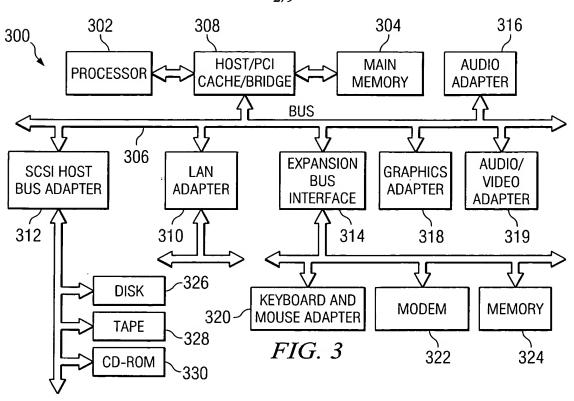

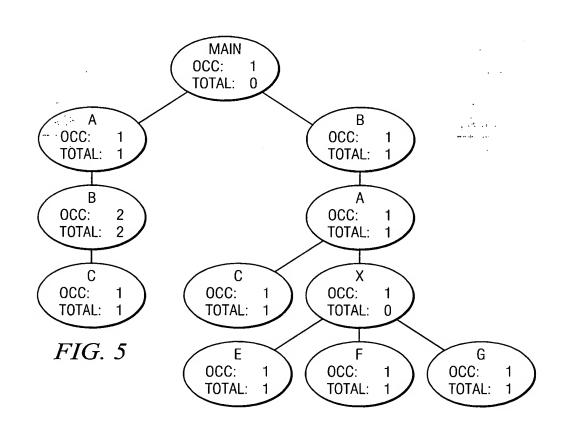

Alexander, III et al.

Method and Apparatus for Averaging Out Variations in Run-to-Run Path Data of a Computer Program

	··-			
SOURCE	CALLS	%BASE =======	%CUM ======	FUNCTION
SELF CHILD	1 1	0.00 0.00	100.00	[0] AC_test_pidtid
PARENT SELF CHILD CHILD	1 1 1 1	0.00 0.00 10.00 10.00	100.00 100.00 60.00 40.00	AC_test_pidtid [1] MAIN B A
PARENT PARENT SELF CHILD CHILD	2 1 3 1	20.00 10.00 30.00 10.00 10.00	30.00 60.00 90.00 50.00 10.00	A MAIN [2] B A C
PARENT PARENT SELF CHILD CHILD CHILD	1 1 2 2 1	10.00 10.00 20.00 20.00 0.00 10.00	40.00 50.00 90.00 30.00 30.00 10.00	MAIN B [3] A B X C
PARENT SELF CHILD CHILD CHILD	1 1 1 1 1	0.00 0.00 10.00 10.00 10.00	30.00 30.00 10.00 10.00 10.00	A [4] X E G F
PARENT PARENT SELF	1 1 2	10.00 10.00 20.00	10.00 10.00 20.00	A B [5] C
PARENT SELF	1 1 1	10.00 10.00 =======	10.00 10.00 =======	X [6] E ======
PARENT SELF	1 1 ====	10.00	10.00 10.00	X [7] F
PARENT SELF	1	10.00	10.00 10.00	X [8] G

Alexander, III et al.

Method and Apparatus for Averaging Out Variations in Run-to-Run Path Data of a Computer Program

4/9


TOTA	AL: 10	CPU SECON	NDS		
Lv	RL	CALLS	%BASE	%CUM	INDENT HkKey_HkName
0	1	1	0.00	100.00	AC test pidtid
1	1	1	0.00	100.00	- MAIN
2	1	1	10.00	40.00	A
3	1	2	20.00	30.00	B
4	1	1	10.00	10.00	C
2	1	1	10.00	60.00	B
3	1	1	10.00	50.00	A
4	1	1	10.00	10.00	C
4	1	1	0.00	30.00	X
5	1	1	10.00	10.00	+E
5	1	1	10.00	10.00	+F
5	1	1	10.00	10.00	+G

FIG. 7

TRACE DATA FOR EXECUTION OF FIRST BUILD OF COMPUTER PROGRAM

	0 pidtid	xyz
	3 > A	
	2 > B	l
ı	7 < B	ľ
	1 > C	ľ
	5 > D	ı
	7 < D	
١		<i>\$.</i>
	_	.,

FIG. 8A

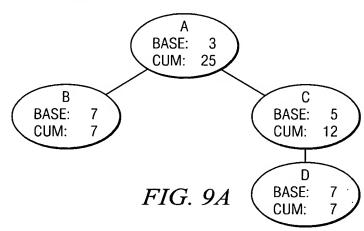

TRACE DATA FOR EXECUTION OF SECOND BUILD OF COMPUTER PROGRAM





FIG. 8B

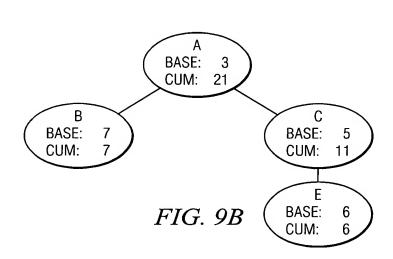

Alexander, III et al.

Method and Apparatus for Averaging Out Variations in Run-to-Run Path Data of a Computer Program


5/9

TOT	TOTAL: 25 CPU SECONDS									
Lv	RL	CALLS	%BASE	%CUM	BASE	CUM	INDENT HkKey_HkName			
0	1	2	12.00	100.00	3	25	xyz_pidtid			
1	1	1	12.00	88.00	3	22	- A			
2	1	1	28.00	28.00	7	7	B			
2	1	1	20.00	48.00	5	12	C			
3	1	1	28.00	28.00	7	7	D			
				_						

FIG. 10A

TOT							
Lv	RL	CALLS	%BASE	%CUM	BASE	CUM	INDENT HkKey_HkName
0	1	2	12.50	100.00	3	24	xyz pidtid
1	1	1	12.50	87.50	3	21	- A
2	1	1	29.17	29.17	7	7	B
2	1	1	20.83	45.83	5	11	C
3	1	1	25.00	25.00	6	6	E


FIG. 10B

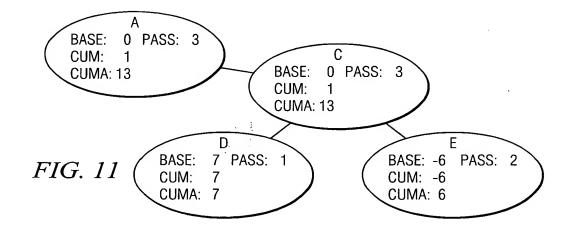

TOT	TOTAL: 25 CPU SECONDS IN TREE A USED AS BASE FOR PERCENTAGES									
Lv	RL	CALLS	%BASE	%CUM	BASE	CUM	CumA	PASS	INDENT HkKey_HkName	
0	1	0	0.00	4.00	0	1	13		difference_pidtid	
1	1	0	0.00	4.00	0	1	13	3	- A	
2	1	0	0.00	4.00	0	1	13	3	C	
3	1	1	28.00	28.00	7	7	7	1	D	
3	1	-1	-24.00	-24.00	-6	-6	6	2	E	
L										

Alexander, III et al.

Method and Apparatus for Averaging Out Variations in Run-to-Run Path Data of a Computer Program

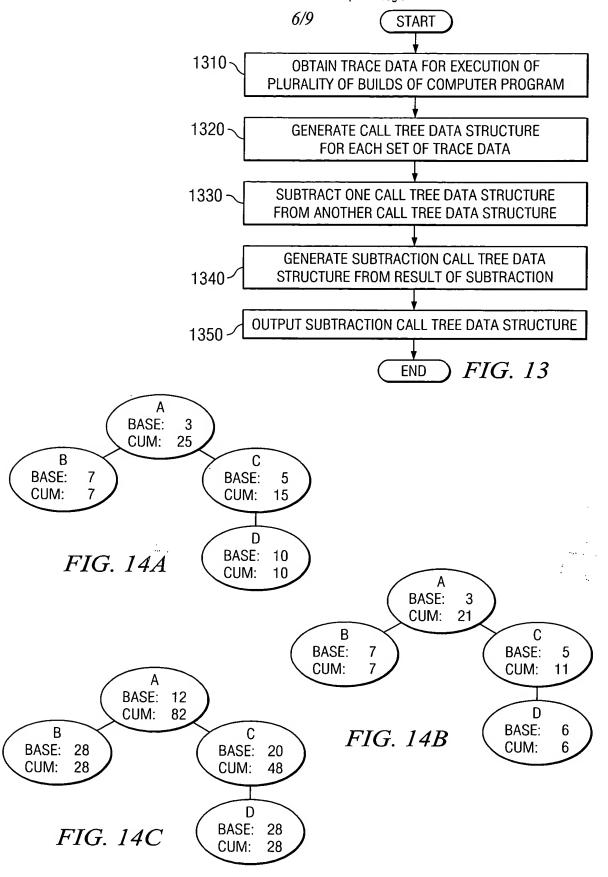


Alexander, III et al.

Method and Apparatus for Averaging Out Variations in Run-to-Run Path Data of a Computer Program

Lv	RL	CALLS	%BASE	%CUM	BASE	CUM	CumA	INDENT HkKey_HkName
0	1	3	12.16	100.00	9	74	74	bigtree pidtid
1	1	3	12.16	87.84	9	65	65	- Ā
2	1	3	28.38	28.38	21	21	21	B
2	1	3	20.27	47.30	15	35	35	C
3	1	2	18.92	18.92	14	14	14	D
3	1	1	8.11	8.11	6	6	6	E

FIG. 15

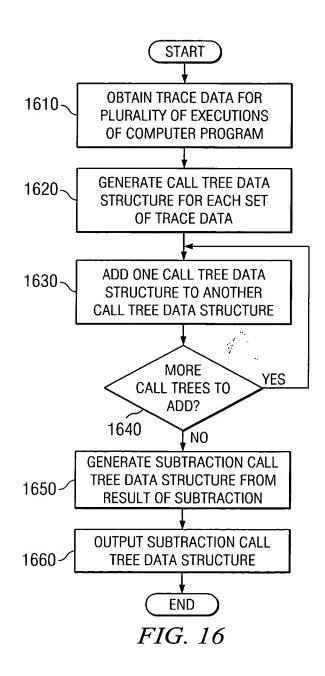

Alexander, III et al.

Method and Apparatus for Averaging Out Variations in Run-to-Run Path Data of a Computer Program

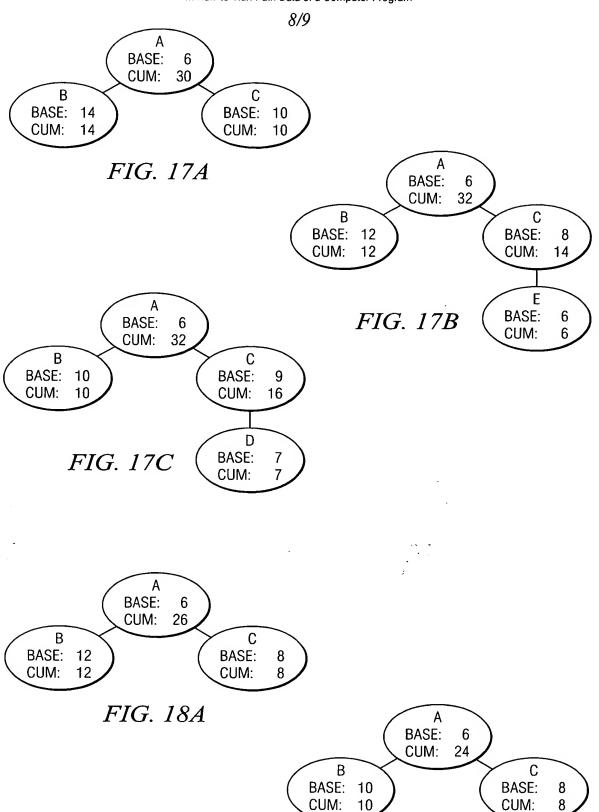


FIG. 18B

Alexander, III et al.

Method and Apparatus for Averaging Out Variations in Run-to-Run Path Data of a Computer Program

